

# Blinking LED Panel Mount Indicator with buzzer P 22 DBF



- indicator lamp/buzzer combination for 22.5 mounting hole
- guaranteed high protection system (IP 65) to the housing
- superior design, therefore, high signaling effect on all sides
- space-saving combination of buzzer and blinking LED indicator for increasing the effect of the signal
- easy to mount label holders available as an accessory
- simple electrical connection by means of screw terminals



Acoustic range according to EN 54



Protection system






Operating temperature

Electrical data	P 22 DBF			
Rated voltage	230 V AC	115 V AC	48 V AC/DC	24 V AC/DC
Rated current consumption	18 – 30 mA	18 – 30 mA	20 – 80 mA	20 – 80 mA
Mechanical data	P 22 DBF			
Operating mode	1 Hz blinking light with buzzer (pulsating tone)			
Sound pressure level	80 dB (A) @ 10 cm			
Light source	LED array			
Service life of the light source	> 50.000 hrs			
Lens colours	red			
Operating temperature	- 25 °C ... + 50 °C			
Relative humidity	90% @ + 20 °C			
Protection system according to EN 60529	IP 65 (to housing)			
Mounting	panel-mounting: Ø 22.5 mm			
Type of connection	screw terminals 1.5 mm <sup>2</sup>			
Weight	90 g			

## Dimensions

## Panel cut-out

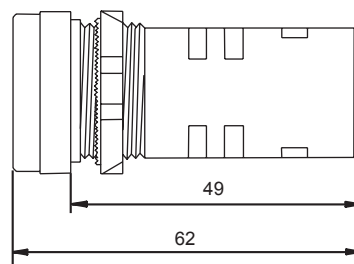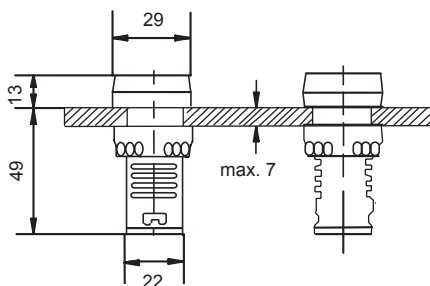


## Ordering details


### Article numbers

Lens colour	Rated voltage	230 V AC	115 V AC	115 V AC	24 V AC/DC
red		232 72 10 5 000	232 72 15 5 000	232 72 15 5 000	232 72 80 5 000

## Options / accessories



Article number:  
232 92 00 0 000



Article number:  
232 91 00 0 000

See page 93  
for illustrations